

01 HDMI Cables	P2~P7
02 DP & DVI Cables	P8~P9
03 VGA Cables	P9-P10
04 USB Cables	P11~P12
05 Video Cables	P13
06 Optical Audio Cables	P14~P15
07 3.5MM Audio Cables	P16~P18
08 Audio Splitter Cables	P19~P22
09 RCA Subwoofer Cables	P23
10 RCA Stereo Audio Cables	P24~P26
11 Composite Cables	P27~P29
12 Instrument Cables	P30~P32
13 XLR Microphone Cables	P33~P35

14 DMX & Microphone Cables	P36~P39
15 2-Parallel Speaker Wire	P40~P42
16 Stage Speaker Wire	P43~P44
17 Power Cables	P45
18 Signal Cables	P46
19 Coaxial Cables	P47~P48
20 Combination Cables	P49
21 Network Cables	P50



## 8K HDMI Cable 2.1v

Item No.: RH881  
 Conductor: 19+1, 30-28AWG Tinned OFC  
 Shield: Al foil + Tinned OFC Braid  
 Plug: 24k gold plated  
 Connector: Zinc Alloy with laser printing  
 Jacket: PVC with braid sleeve  
 OD: 10.0mm  
 Support 8K@60HZ, 4K@120HZ  
 Speed: 48Gbps  
 Support dynamic HDR, VRR, QMS, ALLM,  
 3D video, e ARC, QFT  
 Length: 0.5M -4M



## 8K HDMI Cable 2.1v

Item No.: RH892  
 Conductor: 19+1, 30-28AWG Tinned OFC  
 Shield: Al foil + Tinned OFC Braid  
 Plug: 24k gold plated  
 Connector: Zinc Alloy with laser printing  
 Jacket: PVC with braid sleeve  
 OD: 10.0mm  
 Support 8K@60HZ, 4K@120HZ  
 Speed: 48Gbps  
 Support dynamic HDR, VRR, QMS, ALLM,  
 3D video, e ARC, QFT  
 Length: 0.5M -4M



## 8K Optical HDMI Cable 2.1v

Item No.: RH882  
 Conductor: Optical Fiber  
 Shield: Al foil + Tinned OFC Braid  
 Plug: 24k gold plated  
 Connector: Zinc Alloy, plated color  
 Build in high quality IC  
 Jacket: PVC  
 OD: 4.8mm  
 Support 8K@60HZ, 4K@120HZ  
 Speed: 48Gbps  
 Support dynamic HDR, VRR, QMS, ALLM,  
 3D video, e ARC, QFT  
 Length: 1M-100M



## 8K Optical HDMI Cable 2.1v

Item No.: BHV90  
 Conductor: Optical Fiber  
 Shield: Al foil + Tinned OFC Braid  
 Plug: 24k gold plated  
 Connector: Zinc Alloy, plated color  
 Build in high quality IC  
 Jacket: PVC+braid sleeve  
 OD: 6.8mm  
 Support 8K@60HZ, 4K@120HZ  
 Speed: 48Gbps  
 Support dynamic HDR, VRR, QMS, ALLM,  
 3D video, e ARC, QFT  
 Length: 1M-20M

## 4K@60HZ Optical HDMI Cable

Item No.: RH332  
 Conductor: Optical Fiber  
 Shield: Al foil + Tinned OFC Braid  
 Plug: 24k gold plated  
 Connector: Zinc Alloy with laser printing  
 Build in high quality IC  
 Jacket: LSZH (Hologen free) PVC Jaceckt  
 OD: 4.8mm  
 Support 4K@60HZ, 3840\*2160P  
 Speed: 18Gbps  
 Support static HDR, HDCP 2.2, UHD,4:4:4  
 color space, 3D video  
 Length: 1M -150M

## 4K@60HZ Optical HDMI Cable

Item No.: BHV60  
 Conductor: Optical Fiber  
 Shield: Al foil + Tinned OFC Braid  
 Plug: 24k gold plated  
 Connector: Al Alloy connector cover  
 Build in high quality IC  
 Jacket: PVC Jacket  
 OD: 5.0mm  
 Support 4K@60HZ, 3840\*2160P  
 Speed: 18Gbps  
 Support static HDR, HDCP 2.2, UHD,4:4:4  
 color space, 3D video  
 Length: 1M -150M

## 4K Optical HDMI Cable 2.0v

Item No.: F413  
 Conductor: OFC copper  
 Shield: Al foil + Tinned OFC Braid  
 Plug: 24k gold plated  
 Connector: Aluminum alloy, Plating color  
 Jacket: PVC with nylon braid sleeve  
 OD: 10.0mm  
 Support 4K@60HZ  
 Speed: 18Gbps  
 Support HDR,3D video, ARC  
 Length: 1M-30M

## 8K Optical HDMI Cable 2.1v

Item No.: RH416  
 Conductor: OFC Copper  
 Shield: Al foil + Tinned OFC Braid  
 Plug: 24k gold plated  
 Connector: Aluminum alloy, color options:  
 silver, gold, gunsmoke, customizing  
 Jacket: PVC with braid sleeve  
 OD: 7.0~8.5mm  
 Support 4K@60HZ  
 Speed: 18Gbps  
 Support UHD, HDR, HDCP, 3D, Ethernet,  
 Audio Return Channel  
 Length: 1M-30M



## 4K HDMI Cable



Item No.: RH-W506  
 Conductor: OFC copper  
 Shield: Al foil + Tinned OFC Braid  
 Plug: 24k gold plated  
 Connector: 2 color molded  
 Jacket: PVC  
 OD: 7.3mm  
 Support 4K, 1080p  
 Support for 3D, Ethernet, Audio Return Channel  
 Color options: Black+White; Black+Red; customizing  
 Length: 1M-20M

## 4K@60HZ HDMI Cable



Item No.: RH226  
 Conductor: 19+1 OFC copper  
 Shield: Al foil + Braid Shield  
 Plug: 24k gold plated  
 Connector: 2-color molded  
 Jacket: PVC  
 OD: 7.3-9.0mm  
 Support 4K@60HZ  
 Speed: 18Gbps  
 Support UHD,HDR  
 Length: 1M -20M

## 4K@60HZ HDM Cable Slim



Item No.: RH-891  
 Conductor: 30-26AWG OFC  
 Shield: Al foil + Braid shield  
 Plug: 24k gold plated  
 Connector: Metal cover plated  
 Jacket: PVC with braid sleeve  
 OD: 5.0mm-6.5mm  
 Support 4KX2K, 1080P  
 Speed: 10Gbps  
 Color: Gold, black, gun smoke  
 Length: 0.5M-5M

## 4K@60HZ HDMI Cable



Item No.: RH227  
 Conductor: 19+1 OFC copper  
 Shield: Al foil + Braid Shield  
 Plug: 24k gold plated  
 Connector: 2 color molded  
 Jacket: PVC  
 OD: 7.3-9.0mm  
 Support 4K@60hz  
 Speed: 18Gbps  
 Support 3D, UHD, HDR  
 Color: White, orange, blue, grey  
 Length: 1M -20M

## 4K@60HZ HDMI Cable



Item No.: F400  
 Conductor: OFC copper  
 Shield: Al foil + Tinned OFC Braid  
 Plug: 24k gold plated  
 Connector: 2 color molded  
 Jacket: PVC  
 OD: 8.0mm  
 Support 4K, 2160p  
 Support for 3D, UHD,HDR  
 Color options: Black+White; customizing  
 Length: 1M-15M

## 4K@60HZ HDM Cable Flat



Item No.: F600  
 Conductor: OFC  
 Shield: Al foil + Braid shield  
 Plug: 24k gold plated  
 Connector: 2-color molded  
 Jacket: PVC  
 OD: 3.5\*13.5MM  
 Support 4K@60HZ, 22160P  
 Speed: 18Gbps  
 Color: White+black, customizing  
 Length: 1.8M-5M

## 4K@60HZ HDMI Cable



Item No.: F409  
 Conductor: 19+1 OFC copper  
 Shield: Al foil + Braid Shield  
 Plug: 24k gold plated  
 Connector: 2-color molded  
 Jacket: PVC  
 OD: 8.5mm  
 Support 4K@60HZ  
 Speed: 18Gbps  
 Support UHD,HDR  
 Length: 1M -20M

## 4K@60HZ HDMI Cable Flat



Item No.: F8131  
 Conductor: 19+1 OFC copper  
 Shield: Al foil + Braid Shield  
 Plug: 24k gold plated  
 Connector: Metal connector  
 Jacket: PVC  
 OD: 8.5mm  
 Support 4K@60hz  
 Speed: 18Gbps  
 Support 3D, UHD, HDR  
 Color: Blue, Red, Yellow  
 Length: 1M -20M

## HDMI Cable 1080P



Item No.: RH168A  
 Conductor: 15+1, 30-26AWG CCS  
 Shield: Al foil + Braid shield  
 Plug: 24k gold plated  
 Connector: One-piece molded  
 Jacket: PVC  
 OD: 6.0mm-8.0mm  
 Support 1080p  
 Speed: 10.2Gbps  
 Support 3D, Ethernet, Audio Return Channel  
 Length: 0.5M-40M  
 \*\* 35m-40m carry amplifier

## HDMI Extension Cable 1080p



Item No.: RH278  
 Conductor: 19+1, 30-28AWG, OFC  
 Shield: Al foil + Braid Shield  
 Plug: 24k gold plated  
 Connector: One-piece molded  
 Jacket: PVC  
 OD: 4.5mm  
 Support 4KX2K, 1080P  
 Speed: 10.2Gbps  
 Support 3D, Ethernet, Audio Return Channel  
 Length: 0.5M -3M



## Mini HDMI Cable 1080p

Item No.: RH279  
 Conductor: 19+1, 30-28AWG, OFC  
 Shield: Al foil + Braid Shield  
 Plug: 24k gold plated  
 Connector: One-piece molded  
 Jacket: PVC  
 OD: 6.0mm  
 Support 4KX2K, 1080P  
 Speed: 10.2Gbps  
 Support 3D, Ethernet, Audio Return Channel  
 Length: 0.5M -3M



## HDMI to Type C Adapter Cable

Item No.: RH-V848  
 Conductor: OFC  
 Shield: Al foil + Braid Shield  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 4.5mm  
 Support 4K@30hz, 2160P  
 Length: 1.8M

## Celerity UFO Cable

Item No.: RH331  
Interface: MPO/HDMI/DVI/DP

### Features:

Perfect for project installation:

1. Slim wire and small connector for tubing
2. Plug & play, no need extra power supply
3. Optical fiber transmit signal with no loss, no delay, and it is easy to upgrade by changing adapter cable
4. Widely compatible with HDMI/ DVI / DP



MPO to HDMI 2.0V  
4K@60HZ  
4: 4: 4  
18Gbps  
Support HDCP 2.2V, EDID, CEC



MPO to DVI 1.2  
4K@30HZ  
Support HDCP 2.3V, EDID



MPO to DP 1.2  
8KX4K  
4: 2: 0  
21.6Gbps



## Celerity UFO Cable / Lan Combination

Item No.: RH333  
Interface: MPO/HDMI/DVI/DP

### Features:

Perfect for project installation:

1. Slim wire and small connector for tubing
2. Plug & play, no need extra power supply
3. Optical fiber transmit signal with no loss, no delay, and it is easy to upgrade by changing adapter cable
4. Widely compatible with HDMI/ DVI / DP

\* Lan cable is not included



## Optical Display Port Cable 8K

Item No.: RH-DP8K  
 Conductor: Optical Fiber  
 Shield: Al foil + Tinned OFC Braid  
 Plug: 24k gold plated  
 Connector: Zinc Alloy Plated  
 Build in IC  
 Jacket: PVC, LSZH  
 OD: 4.4mm  
 Support 8K@60HZ, 4K@144HZ  
 Speed: 32Gbps  
 Length: 1M-50M



E-sports Specialist

## Display Port Cable 8K

Item No.: RH-DP01  
 Conductor: 30-26AWG OFC  
 Shield: Al foil + Braid shield  
 Plug: 24k gold plated  
 Connector: Metal cover plated  
 Jacket: PVC with braid sleeve  
 OD: 7.0mm-8.0mm  
 Support 8K@60HZ, 4K@144HZ  
 Speed: 32Gbps  
 Length: 0.5M-5M



E-sports Specialist



## Optical DVI Cable

Item No.: RH337  
 Conductor: 24+1, Optical fiber  
 Shield: Al foil + Braid Shield  
 Plug: 24k gold plated  
 Connector: Zinc Alloy Plated  
 Build-in IC  
 Jacket: PVC  
 OD: 4.5mm  
 Support 4K@30hz, 1080P  
 Speed: 10.2Gbps  
 Support 3D  
 Length: 1M -200M

## HDMI DVI Adapter Cable

Item No.: RH335, HDMI to DVI Cable  
 Item No.: RH336, DVI to HDMI Cable  
 Conductor: 24+1, Optical fiber  
 Shield: Al foil + Braid Shield  
 Plug: 24k gold plated  
 Connector: Zinc Alloy Plated  
 Jacket: PVC  
 OD: 4.5mm  
 Support 4K@30hz, 1080P  
 Speed: 10.2Gbps  
 Support 3D  
 Length: 1M -200M





## VGA Cable 1080P

Item No.: FV61  
 Conductor: 3+9, Tinned OFC  
 Shield: Al foil + Braid Shield  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 With Ferrite cores  
 OD: 8.0mm  
 Support 1080P  
 Length: 10M -50M

## VGA Cable 1080P

Item No.: RH-V801A  
 Conductor: 3+6, 3+9, OFC  
 Shield: Al foil + Braid Shield  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 With Ferrite cores  
 OD: 8.0-8.5mm  
 Support 1080P  
 Length: 1M -50M

## 1080P VGA Cable 3+9

Item No.: FV53V  
 Conductor: 3+9, OFC  
 Shield: Al foil + Braid shield  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 8.1MM  
 Support 1080p  
 Speed: 10.2Gbps  
 Length: 1M-30M  
 \*\*Specializing for project installation\*\*

## 3+6C VGA Cable

Item No.: FV55  
 Conductor: 3+6, Tinned OFC  
 Shield: Al foil + Braid shield  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 8.0MM  
 Length: 0.5M-30M  
 Package: Polybag

## VGA Cable



Item No.: FV58  
 Conductor:  
 1-10M: 3+6 OFC  
 10+: 3+9, OFC  
 Shield: Al foil + Tinned OFC Braid  
 Plug: Nickel plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 6.0mm  
 Length: 1M-15M

## HDMI to DVI Cable Bi-direction



Item No.: RH-D711A  
 Conductor: 24+1, OFC  
 Shield: Al foil + Braid shield  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 7.0mm-8.2mm  
 Support 1080p  
 Speed: 10.2Gbps  
 Length: 0.5M-20M



## DVI 24+1 Cable

Item No.: RH-D702A  
 Conductor: 24+1, OFC  
 Shield: Al foil + Tinned OFC Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 7.0mm-8.2mm  
 Support 1080p  
 Speed: 10.2Gbps  
 Length: 0.5M-30M

\*20m and above have build-in IC



## 4K HDMI Type D+Type A Cable

Item No.: RH339  
 Conductor: Optical Fiber  
 Shield: Al foil + Tinned OFC Braid  
 Plug: 24k gold plated  
 Connector: Zinc Alloy, plated color  
 Build in high quality IC  
 Jacket: PVC  
 OD:5.0MM  
 Support 4K@60HZ  
 Speed: 18Gbps  
 Support dynamic HDR, VRR, 3D video, ARC  
 Length: 10M-50M

HDMI micro + HDMI Type A Male to HDMI  
 micro + HDMI Type A Male

## USB AM – AM Data Cable



Item No.: USB241  
 Conductor: OFC copper  
 Shield: Al foil + Tinned OFC Braid  
 Plug: Nickel plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 4.5mm  
 Length: 1M-10M

## USB AM to AF Extension Cable



Item No.: USB244  
 Conductor: OFC copper  
 Shield: Al foil + Tinned OFC Braid  
 Plug: Nickel plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 4.5mm  
 Length: 1M-10M

## USB AM – BM Printer Cable



Item No.: USB242  
 Conductor: OFC copper  
 Shield: Al foil + Tinned OFC Braid  
 Plug: Nickel plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 4.5mm  
 Length: 1M-10M

## USB 3.0 Printer Cable



Item No.: RH-U622  
 Conductor: 4 cores OFC, 24AWG+28AWG  
 Shield: Al foil + CCA Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 5.0MM  
 Length: 0.5M-10M

## USB 3.0 A Male to A Male Cable

Item No.: RH-U622  
 Conductor: 4 cores OFC, 24AWG+28AWG  
 Shield: Al foil + CCA Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 5.0MM  
 Length: 0.5M-10M



## USB 3.0 Extension Cable

Item No.: RH-U621  
 Conductor: 4 cores OFC, 24AWG+28AWG  
 Shield: Al foil + CCA Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 5.0MM  
 Length: 0.5M-10M

## USB 3.0 Male to Male Cable

Item No.: USB301  
 Conductor: OFC copper  
 Shield: Al foil + Tinned OFC Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 5.5mm  
 Length: 1M-10M



## USB 3.0 Extension Cable

Item No.: USB302  
 Conductor: OFC copper  
 Shield: Al foil + Tinned OFC Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 5.5mm  
 Length: 1M-10M

## HD-SDI BNC Cable 1080P

Item No.: F100  
 Conductor: OFC  
 Shield: Al foil + Braid Shield  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 5.0mm  
 Support 1080P  
 Length: 0.5M -30M



## HD-SDI BNC-RCA Cable 1080P

Item No.: F101  
 Conductor: OFC  
 Shield: Al foil + Braid Shield  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 5.0mm  
 Support 1080P  
 Length: 0.5M -30M



## RCA-S video Cable

Item No.: F801  
 Conductor: OFC  
 Shield: Al foil + Braid Shield  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 5.0mm  
 Length: 0.5M -30M



## S-video Cable

Item No.: F800  
 Conductor: OFC  
 Shield: Al foil + Braid Shield  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 5.0mm  
 Length: 0.5M -30M



### Optical SPDIF Subwoofer Cable



Item No.: F072  
Conductor: Optical  
Plug: 24k gold plated brass  
Connector: Zinc Alloy  
Jacket: PVC with braid sleeve  
OD: 8.5mm  
Compatible with standard and high-definition devices with Toslink (S/PDIF, optical) ports  
Support uncompressed PCM audio, compressed 5.1 to 7.1 surround, sound systems including Dolby Digital Plus, DTS-HD High Resolution and LPCM.  
Length: 0.5M -30M

### Toslink Optical Audio Cable



Item No.: OPT060  
Conductor: Optical  
Plug: 24k gold plated  
Connector: Metal  
Jacket: PVC  
OD: 6.0MM  
Length: 1M-10M  
Application: PA system, Car audio, Amplifier, Speaker


Colors:   

### Optical Audio Cable



Item No.: OPT040 , OPT005 (triangle)  
Conductor: Optical fiber  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 4.0mm  
Length: 1M-10M  
Application: devices with Toslink interface

### Optical Fiber Audio Cable 5.1

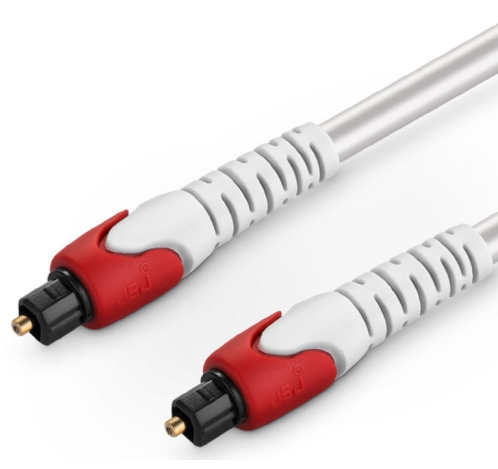

Item No.: FG62  
Conductor: Optical fiber  
Plug: 24k gold plated  
Connector: 2-color Molded  
Jacket: PVC  
OD: 6.0mm  
Color: White+red, black+blue, customizing  
Compatible: Toslink, S/PDIF, Optical  
Support 5.1, 7.1 surround sound system, Dolby digital plus, DTS-HD, High resolution, LPCM  
Length: 0.5M -30M

### Optical Audio Cable



Item No.: OPT007  
Conductor: Optical  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Zinc Alloy  
Jacket: PVC with braid sleeve  
OD: 8.5mm  
Length: 1M-5M  
Application: PA system, Car audio, Amplifier, Speaker

### Optical Audio Cable



Item No.: OPT016  
Conductor: Optical  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Aluminum Alloy  
Jacket: PVC with braid sleeve  
OD: 8.5mm  
Length: 1M-5M  
Application: PA system, Car audio, Amplifier, Speaker

### Toslink Optical Audio Cable



Item No.: OPT014  
Conductor: Optical  
Plug: 24k gold plated  
Connector: Aluminum Alloy  
Jacket: PVC with braid sleeve  
OD: 4.0MM  
Length: 1M-5M  
Application: PA system, Car audio, Amplifier, Speaker, cell phone, PC




### Toslink Optical Audio Cable



Item No.: OPT0A1  
Conductor: Optical  
Plug: 24k gold plated  
Connector: Molded, Multi-color optional  
Jacket: PVC  
OD: 6.0MM  
Length: 1M-10M  
Application: PA system, Car audio, Amplifier, Speaker, cell phone, PC

### 3.5MM Male to Male Audio Cable

Item No.: F212  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 5.0mm  
Length: 0.5M-30M  
Application: PA system, Car audio

Colors:   



### 3.5MM Male to Male Aux Cable


Item No.: T13  
Conductor: Enameled OFC  
Plug: 24k gold plated brass  
Connector: Zinc Alloy  
Jacket: PE  
OD: 3.0mm  
Length: 0.5M-15M  
Application: Car audio, computer, cell phone

Colors:   



### 3.5MM Right Angle Audio Cable

Item No.: F6212W  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 5.0mm  
Length: 0.5M-30M  
Application: PA system, Car audio

Colors:   



### 3.5MM Aux Audio Cable

Item No.: WL02  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Zinc Alloy  
Jacket: PVC / PE  
OD: 4.0mm  
Length: 0.5M-30M  
Application: Car audio, computer, cell phone




Colors:    





### 3.5MM Aux Audio Cable





Item No.: T01  
Conductor: Enameled OFC  
Plug: 24k gold plated  
Connector: Metal  
Jacket: PE  
OD: 3.0mm  
Length: 0.5M-5M  
Application: Car audio, computer, cell phone

Colors:   



### 3.5MM Male to Male Audio Cable




Item No.: F612  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 4.5mm  
Length: 0.5M-30M  
Application: PA system, Car audio


Colors:    



### 3.5MM Stereo Audio Cable



Item No.: WL01  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 3.5mm  
Length: 0.5M-30M  
Application: PA system, Car audio

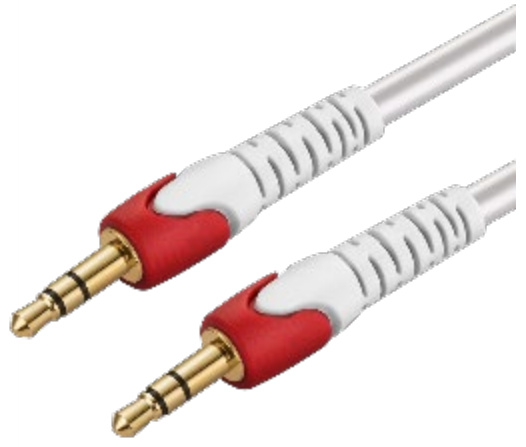Colors:   



### 3.5MM Aux Audio Cable

Item No.: RH-A121  
Conductor: OFC Copper  
Shield: Braid shield  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 4.5mm  
Length: 0.5M-5M  
Application: Car audio, computer, cell phone

Colors:   



### 3.5MM Aux Extension Cable



Item No.: T16  
Conductor: Enameled OFC  
Plug: 24k gold plated brass  
Connector: Zinc Alloy  
Jacket: PE  
OD: 3.0mm  
Length: 0.5M-15M  
Application: Car audio, computer, cell phone, headset

Colors:

### 3.5MM Aux Extension Cable



Item No.: T02  
Conductor: Enameled OFC  
Plug: 24k gold plated  
Connector: Metal  
Jacket: PE  
OD: 3.0mm  
Length: 0.5M-5M  
Application: Car audio, computer, cell phone

Colors:

### 3.5MM Aux Extension Cable



Item No.: F613  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 4.0mm  
Length: 0.5M-30M  
Application: PA system, Car audio

Colors:

### 3.5MM Extension Audio Cable



Item No.: A120  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 4.5mm  
Length: 0.5M-30M  
Application: PA system, Car audio

Colors:

### 3.5MM to 2RCA Audio Cable



Item No.: WL302  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Metal  
Jacket: PVC  
OD: 4.0mm  
Length: 0.5M-30M  
Application: PA system, Car audio, Amplifier, Speaker

Colors:

### 3.5MM to 2RCA Audio Cable



Item No.: F3322  
Conductor: Enameled OFC  
Plug: 24k gold plated  
Connector: Metal  
Jacket: PVC  
OD: 5.0mm  
Length: 0.5M-5M  
Application: PA system, Car audio, Amplifier, Speaker

Colors:

### 3.5MM to 2RCA Audio Cable



Item No.: F3321  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 4.5mm  
Length: 0.5M-30M  
Application: PA system, Car audio, Amplifier, Speaker

Colors:

### 3.5MM to 2RCA Audio Cable






Item No.: WL303  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 4.0mm  
Length: 0.5M-30M  
Application: PA system, Car audio

Colors:



### 3.5MM to 2RCA Audio Cable

Item No.: WL306  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Metal  
Jacket: PVC  
OD: 5.0mm  
Length: 0.5M-30M  
Application: PA system, Car audio, Amplifier, Speaker

Colors:   



### 3.5MM to 2RCA Audio Cable




Item No.: WY301  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 4.0mm  
Length: 0.5M-30M  
Application: PA system, Car audio, Amplifier, Speaker

Colors:   



### 3.5MM to 2RCA Audio Cable

Item No.: F321  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 3.8mm  
Length: 0.5M-30M  
Application: PA system, Car audio, Amplifier, Speaker

Colors:   



### 3.5MM to 2RCA Audio Cable

Item No.: F332  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 5.0mm  
Length: 0.5M-30M  
Application: PA system, Car audio

Colors:  



### 3.5MM to 2RCA Extension Cable

Item No.: F328  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 3.8mm x 2C  
Length: 0.25M-30M  
Application: PA system, Car audio, Amplifier, Speaker, cell phone, PC

Colors:   



### 1\*RCA to 2RCA Extension Cable

Item No.: F326  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 3.8mm x 2C  
Length: 0.25M-30M  
Application: PA system, Car audio, Amplifier, Speaker, cell phone, PC

Colors:   



### 3.5MM to 2RCA Extension Cable

Item No.: F330  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 3.8mm x 2C  
Length: 0.25M-30M  
Application: PA system, Car audio, Amplifier, Speaker, cell phone, PC

Colors:   




### 1\*RCA to 2RCA Extension Cable

Item No.: F325  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 3.8mm x 2C  
Length: 0.25M-30M  
Application: PA system, Car audio, Amplifier, Speaker, cell phone, PC

Colors:   


### 1\*RCA to 2RCA Audio Cable

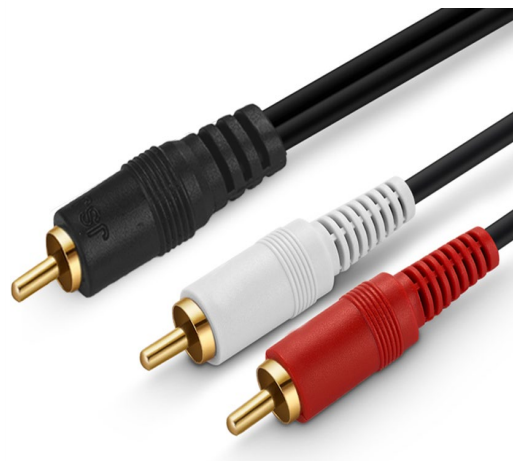

Item No.: F321  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 3.8mm x 2C  
Length: 0.25M-30M  
Application: PA system, Car audio, Amplifier, Speaker, cell phone, PC

Colors:   

### 1\*RCA to 2RCA Extension Cable

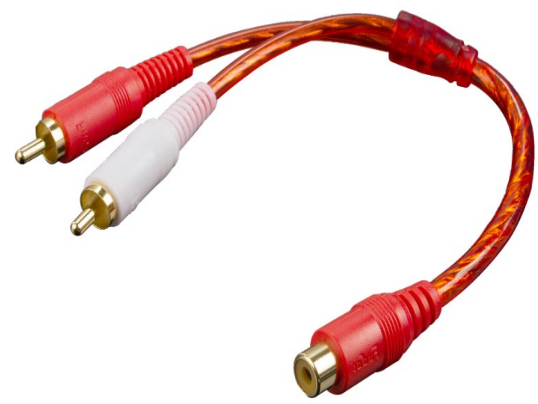

Item No.: F626  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 5.5mm  
Length: 0.25M, 1.8M  
Application: PA system, Car audio, Amplifier, Speaker, cell phone, PC

Colors:   

### 3.5MM Splitter Extension Cable



Item No.: F327  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 3.8mm x 2C  
Length: 0.5M-30M  
Application: PA system, Car audio, Amplifier, Speaker


Colors:   

### 3.5MM MIC Splitter Cable




Item No.: WL312  
Conductor: enamel OFC copper  
Plug: 24k gold plated  
Connector: Metal  
Jacket: PVC  
OD: 3.0mm  
Length: 0.25MM  
Application: Headset, Cell phone, computer

Colors:   

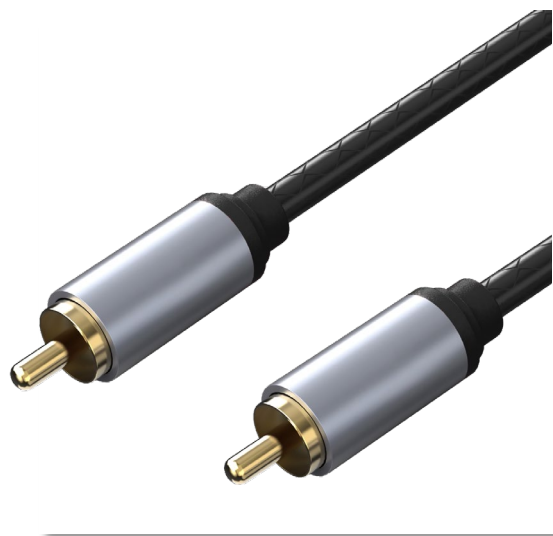

### RCA to RCA Subwoofer Cable

Item No.: F3311  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC leather  
 OD: 4.5MM  
 Length: 1m, 2m  
 Application: HI-FI, PA system, Car audio, Amplifier, Speaker, cell phone, PC

Colors: 



### RCA to RCA Subwoofer Cable

Item No.: F08  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC  
 OD: 9.0MM  
 Length: 0.25M-30M  
 Application: HI-FI, PA system, Car audio, Amplifier, Speaker, cell phone, PC

Colors:   



### RCA to RCA Audio Cable

Item No.: YW212  
 Conductor OFC copper  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC with nylon braid sleeve  
 OD: 6.0MM  
 Length: 1M-10M  
 Application: PA system, Car audio, Amplifier, Speaker, cell phone, PC

Colors:   



### RCA Video Cable


Item No.: F211  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Two option: Straight & Right Angle  
 Jacket: PVC  
 OD: 5.0mm x 2C  
 Length: 1M-30M  
 Application: PA system, Car audio, Amplifier, Speaker, cell phone, PC



## 2RCA to 2RCA Audio Cable

Item No.: F4422  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC  
 OD: 5.0mm x5.0mm  
 Length: 0.5M-30M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:



## HiFi 2RCA to 2RCA Audio Cable

Item No.: D4R337  
 Conductor: OFC  
 Shield: OFC braid braid  
 Plug: 24k gold plated  
 Connector: 2 color Molded  
 Jacket: PVC  
 OD: 5.0mm x5.0mm  
 Length: 0.5M-30M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:



## HiFi 2RCA to 2RCA Audio Cable

Item No.: F409  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC transparent brown  
 OD: 4.5mmX4.5mm  
 Length: 0.5M-30M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:



## HiFi 2RCA Male to Male Cable

Item No.: F410  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: 2 colors molded  
 Jacket: PVC  
 OD: 2.5mm x 2.5mm  
 Length: 0.5M-30M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:







## 2RCA to 2RCA Audio Cable

Item No.: F3324  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Aluminum Alloy  
 Jacket: Leather touch soft PVC  
 OD: 4.5mm x4.5mm  
 Length: 0.5M-30M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:



## 2RCA to 2RCA Audio Cable

Item No.: F442  
 Conductor: OFC  
 Shield: OFC braid braid  
 Plug: 24k gold plated  
 Connector: 2 color Molded  
 Jacket: PVC  
 OD: 5.0mm x5.0mm  
 Length: 0.5M-30M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:



## 2RCA to 2RCA Audio Cable

Item No.: WLD2102  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC transparent brown  
 OD: 3.5mmX3.5mm  
 Length: 0.5M-20M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:



## 2RCA to 2RCA Audio Cable

Item No.: WL407  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: 2 colors molded  
 Jacket: PVC  
 OD: 2.5mm x 2.5mm  
 Length: 0.5M-30M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:






## 2RCA to 2RCA Audio Cable

Item No.: WY402  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 4.0mm  
 Length: 0.5M-30M  
 Application: PA system, Car audio,  
 Amplifier, Speaker


Colors:



## 2RCA to 2RCA Audio Cable

Item No.: F4421  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 4.5mm  
 Length: 0.5M-30M  
 Application: PA system, Car audio

Colors:



## 2RCA to 2RCA Audio Cable

Item No.: WY401  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC transparent brown  
 OD: 4.0mmX4.0mm  
 Length: 0.5M-30M  
 Application: PA system, Car audio,  
 Amplifier, Speaker

Colors:



## 2RCA to 2RCA Audio Cable

Item No.: WL421  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC  
 OD: 3.8mmX3.8mm  
 Length: 0.5M-30M  
 Application: PA system, Car audio, Amplifier,  
 Speaker

Colors:





### 3.5MM 4Pole to 3RCA AV Cable

Item No.: F368  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 3.0mm x 3C  
 Length: 0.5M-30M  
 Application: PA system, Car audio, Amplifier, Speaker, cell phone, PC

Colors:   



### 3.5mm 3Pole to 3RCA AV Cable




Item No.: F371  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: Transparent PVC  
 OD: 4.5mm x 4.5mm X 4.5mm  
 Length: 0.5M-30M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:   



### 3.5mm 4Pole to 3RCA AV Cable

Item No.: F370  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC transparent brown  
 OD: 3.0mmX3C  
 Length: 0.5M-20M  
 Application: Computer, multi-media, CD, HDTV

Colors:   



### 3RCA to 3BNC AV Cable

Item No.: D689  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC  
 OD: 3.0MMX3C  
 Length: 0.5M-15M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:   



### 3RCA to 3RCA Audio Video Cable

Item No.: F6432  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC  
 OD: 5.0mm x 5.0mm x 5.0mm  
 Length: 0.5M-30M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:   



### 3RCA to 3RCA Audio Video Cable

Item No.: WL609  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC  
 OD: 4.0mm x4.0mm  
 Length: 0.5M-30M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:   



### 3RCA to 3RCA RGB Cable

Item No.: WL606  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC  
 OD: 5.0mmX3C  
 Length: 0.5M-20M  
 Application: Computer, multi-media, CD, HDTV

Colors:   



### RCA Audio Video Cable

Item No.: WL608  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC  
 OD: 5.0MMX3C  
 Length: 0.5M-30M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:   

### 3RCA to 3RCA AV Cable

Item No.: F6431  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC transparent brown  
 OD: 5.0mm x 5.0mm x 5.0mm  
 Length: 0.5M-30M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:   

### 3RCA to 3RCA AV Cable

Item No.: F601  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: Transparent PVC  
 OD: 4.5mm x 4.5mm X 4.5mm  
 Length: 0.5M-30M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:   

### 3RCA to 3RCA AV Cable

Item No.: F633  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 4.0mm x 5.0mm X 4.0mm  
 Length: 0.5M-30M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:   

### 3RCA to 3RCA RGB Video Cable

Item No.: F668  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: Transparent PVC  
 OD: 5.0mm x3C  
 Length: 0.5M-30M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:   

### 3.5mm to 6.35 Splitter Cable



Item No.: YW320W  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Molded, Right Angle  
 Jacket: PVC  
 OD: 4.0MM x2C  
 Length: 1M-20M  
 Application: HIFI, PA system, Car audio, Amplifier, Speaker, cell phone, PC

Colors:   

### 3.5mm to 6.35 Splitter Cable



Item No.: F414  
 Conductor: OFC copper  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC with braid sleeve  
 OD: 4.0mm x 2C  
 Length: 1M-20M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:   



### 3.5mm to 6.35 Splitter Cable

Item No.: YW320  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 4.0MM X2C  
 Length: 1M-20M  
 Application: PA system, Car audio, Amplifier, Speaker, cell phone, PC

Colors:   



### 3.5MM Stereo to 2\*6.35 Cable

Item No.: YW03  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: Transparent PVC  
 OD: 5.0mm x3C  
 Length: 0.5M-30M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:   

### 3.5MM to 6.35MM Audio Cable



Item No.: YW421  
Conductor: OFC Copper  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 4.0MM X2C  
Length: 1M-10M  
Application: PA system, Car audio, Amplifier, Speaker, cell phone, PC

Colors:   

### 2.5mm to 6.35 Mono Audio Cable



Item No.: YW02  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC  
OD: 4.0MM X2C  
Length: 1M-20M  
Application: PA system, Car audio, Amplifier, Speaker, cell phone, PC

Colors:   

### 6.35 Stereo to 2RCA Audio Cable



Item No.: YW01  
Conductor: OFC copper  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Molded  
Jacket: PVC with braid sleeve  
OD: 4.0mm x 2C  
Length: 1M-20M  
Application: PA system, Car audio, Amplifier, Speaker

Colors:   

### 3.5MM Stereo to 2\*6.35 Cable



Item No.: YW323  
Conductor: OFC  
Shield: OFC Spiral Braid  
Plug: 24k gold plated  
Connector: Metal  
Jacket: Transparent PVC  
OD: 5.3mm x3C  
Length: 0.5M-30M  
Application: PA system, Car audio, Amplifier, Speaker

Colors:   

### 6.35mm Instrument Jack Cable



Item No.: F411  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 6.0MM  
 Length: 0.25M-30M  
 Application: HIFI, PA system, Car audio,  
 Amplifier, Speaker, cell phone, PC

Colors:



### 6.35mm Instrument Jack Cable



Item No.: YW0421  
 Conductor: Optical  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC with braid sleeve  
 OD: 6.0mm  
 Length: 0.5M-30M  
 Application: PA system, Car audio,  
 Amplifier, Speaker

Colors:



### 6.35mm Instrument Jack Cable




Item No.: F411W  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Molded  
 Two option: Straight & Right Angle  
 Jacket: PVC  
 OD: 6.0MM  
 Length: 1M-30M  
 Application: PA system, Car audio, Amplifier,  
 Speaker, cell phone, PC

### 3.5MM to 6.35MM Audio Cable



Item No.: F521  
 Conductor: Optical  
 Plug: 24k gold plated  
 Connector: Molded  
 Jacket: PVC  
 OD: 4.5MM  
 Length: 1M-10M  
 Application: PA system, Car audio,  
 Amplifier, Speaker, cell phone, PC

Colors:





### RCA to XLR Microphone Cable



Item No.: F607  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Metal  
 Connector Type: Male / Female  
 Jacket: PVC  
 OD: 6.0MM  
 Length: 1M-20M  
 Application: HIFI, PA system, Car audio, Amplifier, Speaker, cell phone, PC

Colors:   

### 6.35 to XLR Microphone Cable



Item No.: F803  
 Conductor: OFC copper  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC with braid sleeve  
 OD: 6.2mm  
 Length: 1M-20M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:   



### 6.35 to XLR Microphone Cable

Item No.: YW015  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC  
 OD: 6.0MM  
 Length: 1M-20M  
 Application: PA system, Car audio, Amplifier, Speaker, cell phone, PC

Colors:   



### 6.35MM to XLR Audio Cable

Item No.: YW043  
 Conductor: OFC Copper  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC  
 OD6.0MM  
 Length: 1M-10M  
 Application: PA system, Car audio, Amplifier, Speaker, cell phone, PC

Colors:   

### XLR Male to Female Cable



Item No.: YW012  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC  
 OD: 6.0mm  
 Length: 1M-20M  
 Application: HIFI, PA system, Car audio, Amplifier, Speaker, cell phone, PC

Colors:



### XLR Male to Female Cable



Item No.: YW031  
 Conductor: OFC copper  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC with braid sleeve  
 OD: 6.5mm  
 Length: 1M-20M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:



### XLR Male to Female Cable

Item No.: YW021  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC  
 OD: 6.0MM  
 Length: 1M-20M  
 Application: PA system, Car audio, Amplifier, Speaker, cell phone, PC

Colors:



### XLR Male to Female Audio Cable



Item No.: YW010  
 Conductor: OFC Copper  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC  
 OD: 6.0mm  
 Length: 1M-10M  
 Application: PA system, Car audio, Amplifier, Speaker, cell phone, PC

Colors:



### XLR to 2\* 6.35MM Jack Cable



Item No.: XLR705  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: Flexible PVC  
 OD: 3.8MM\*2C  
 Length: 1M-20M  
 Application: Mixer, Amplifier and other PA system equipment

Colors:



### 6.35MM to 2\*XLR Audio Cable



Item No.: XLR703  
 Conductor: OFC  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC  
 OD: 3.8MM \*2C  
 Length: 1M-20M  
 Application: Mixer, Amplifier and other PA system equipment

Colors:



### 3.5MM Stereo to 2\* XLR Cable



Item No.: XLR702  
 Conductor: OFC copper  
 Shield: OFC Spiral Braid  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC with braid sleeve  
 OD: 6.5mm  
 Length: 1M-20M  
 Application: PA system, Car audio, Amplifier, Speaker

Colors:



### XLR Male to 2RCA Audio Cable



Item No.: XLR704  
 Conductor: OFC Copper  
 Plug: 24k gold plated  
 Connector: Metal  
 Jacket: PVC  
 OD: 6.0mm  
 Length: 1M-10M  
 Application: Mixer, Amplifier and other PA system equipment

Colors:








## Balanced Microphone Cable

- 99.99% High purity OFC copper conductor with low resistance value, providing better signal transmission.
- Twisted strands to reduce interference
- Aluminum foil + OFC copper/Tinned copper shielded
- Class I flexible PVC jacket, tangle free, easy to ray and reel
- Color options: black, red, blue,purple, customizing

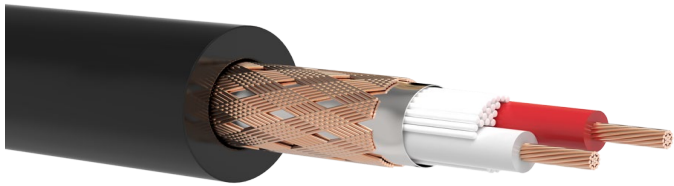


### Application

- Permanent installation in buildings, recording studios, broadcast, Car audio, home theater
- Interior wiring of racks and HiFi Loudspeakers, amplifier etc
- Connect to banana connector, U-spade connector and other speaker connectors



## Balanced Microphone Cable

- 99.99% High purity OFC copper conductor with low resistance value, providing better signal transmission.
- Twisted strands to reduce interference
- Aluminum foil + OFC copper/Tinned copper shielded
- Class I flexible PVC jacket, tangle free, easy to ray and reel
- Color options: black, red, blue,purple, customizing

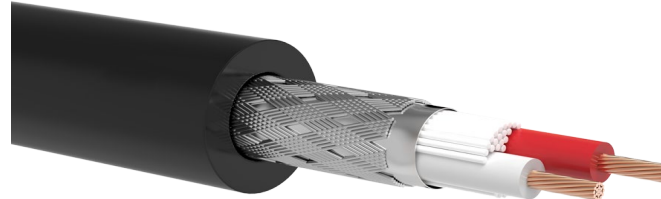

### Application

- Permanent installation in buildings, recording studios, broadcast, Car audio, home theater
- Interior wiring of racks and HiFi Loudspeakers, amplifier etc
- Connect to banana connector, U-spade connector and other speaker connectors


Item Code	OD (MM)	No. of Cores	No. of Strands	MM <sup>2</sup> (AWG)	Shield Material	Shielding	Shield factor	Package
MK380	6.0	2	24/0.12	0.272(23)	OFC+Al foil	96/0.09	85%	Coil/drum
MK161	6.0	2	30/0.1	0.236(23)	OFC+Al foil	96/0.1	95%	Coil/drum
MK151	6.0	2	40/0.09	0.254(23)	OFC+Al foil	112/0.09	95%	Coil/drum
MK152	6.2	2	40/0.09	0.254(23)	OFC+Al foil	128/0.09	98%	Coil/drum
MK148	6.5	2	48/0.09	0.307(23)	OFC+Al foil	144/0.09	99%	Coil/drum

Item Code	OD (MM)	No. of Cores	No. of Strands	MM <sup>2</sup> (AWG)	Shield Material	Shielding	Shield factor	Package
MK163	6.0	2	30/0.1	0.236(23)	Tinned copper	112/0.1	96%	Coil/drum
MK322	6.0	2	30/0.1	0.236(23)	Tinned copper	128/0.1	96%	Coil/drum
MK387	6.7	2	24/0.12	0.272(23)	Tinned copper	112/0.1	96%	Coil/drum



## Balanced Microphone Cable

- 99.99% High purity OFC copper conductor with low resistance value, providing better signal transmission.
- Twisted strands to reduce interference
- Al.foil+OFC copper/Tinned copper shielded
- Class I flexible PVC jacket
- Color options: red, blue, customizing

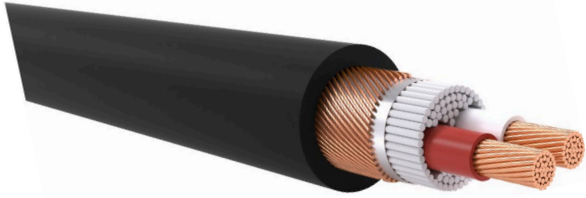


### Application

- Permanent installation in buildings, recording studios, broadcast, Car audio, home theater
- Interior wiring of racks and HiFi Loudspeakers, amplifier etc
- Connect to banana connector, U-spade connector and other speaker connectors



## Balanced Microphone Cable

- 99.99% High purity OFC copper conductor with low resistance value, providing better signal transmission.
- Twisted strands to reduce interference
- High performance tinsel wire
- Anti-oxidizing material
- Dual Jacket protection
- Red bar to identify positive and negative poles
- Meter marks can be printed on the cable
- Color options: red, blue, customizing

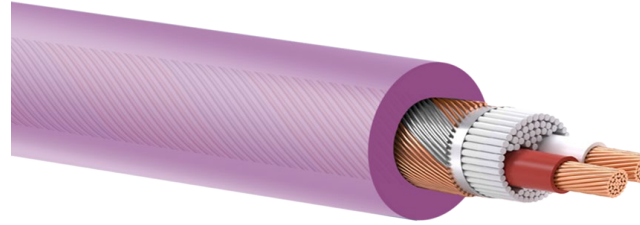

### Application

- Permanent installation in buildings, recording studios, broadcast, Car audio, home theater
- Interior wiring of racks and HiFi Loudspeakers, amplifier etc
- Connect to banana connector, U-spade connector and other speaker connectors


Item Code	OD (MM)	No. of Cores	No. of Strands	MM <sup>2</sup> (AWG)	Shield Material	Shielding	Shield factor	Package
MK132	6.0	2	27/0.09	0.172(25)	OFC	80/0.09	90%	Coil/drum
MK168	6.0	2	32/0.09	0.203(24)	OFC	96/0.09	92%	Coil/drum
MK2000	6.0	2	24/0.12	0.272(23)	OFC	100/0.1	95%	Coil/drum

Item Code	OD (MM)	No. of Cores	No. of Strands	MM <sup>2</sup> (AWG)	Shield Material	Shielding	Shield factor	Color
MK158	6.0	2	28/0.09	0.178(25)	OFC	96/0.09	92%	Blue/brown/purple
MK186	6.2	2	29/0.09	0.178(25)	Tinned copper	96/0.09	92%	brown
MK189	6.0	2	23/0.09+3P	0.298(22)	OFC+Tinsel	50/0.09/OFC+15P	90%	brown
MK366	6.0	2	24/0.12	0.272(23)	TC+OFC	60/0.1 /OFC + 20/0.09 TC	90%	Purple
MK368	6.0	2	24/0.12	0.272(23)	TC+OFC	60/0.1 /OFC + 20/0.09 TC	90%	brown
MK396	6.2	2	24/0.12	0.272(23)	TC+Tinsel	15/0.12+38P	85%	Brown/blue/purple



## AES/EBU Data Cable

- 99.99% High purity OFC copper conductor with low resistance value, providing better signal transmission.
- Twisted strands to reduce interference
- Al.foil+OFC copper/Tinned copper shielded
- Class I flexible PVC jacket
- Color options: red, blue, customizing

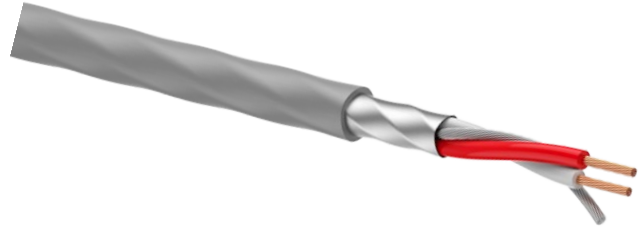


### Application

- Permanent installation in buildings, recording studios, broadcast, Car audio, home theater
- Interior wiring of racks and HiFi Loudspeakers, amplifier etc
- Connect to banana connector, U-spade connector and other speaker connectors



## DMX Cable

- 99.99% High purity OFC copper conductor with low resistance value, providing better signal transmission.
- Twisted strands to reduce interference
- High performance tinsel wire
- Anti-oxidizing material
- Dual Jacket protection
- Red bar to identify positive and negative poles
- Meter marks can be printed on the cable
- Color options: red, blue, customizing

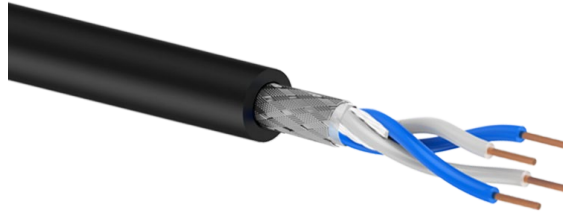

### Application

- Permanent installation in buildings, recording studios, broadcast, Car audio, home theater
- Interior wiring of racks and HiFi Loudspeakers, amplifier etc
- Control of lighting, scanner units, and displays

Item Code	OD (MM)	No. of Cores	No. of Strands	MM <sup>2</sup> (AWG)	Shield Material	Shielding	Shield factor	Color
VT03	3.0	2	19/0.1	0.145(25)	OFC+AL Foil	30/0.1	100%	black
MK143	4.0	2	28/0.09		OFC+ Al Foil	52/0.09	100%	Black/blue
MK145	3.5	2	24/0.09		TC+ Al Foil	35/0.09(drain)	100%	Grey/black

Item Code	OD (MM)	No. of Cores	No. of Strands	Shield Material	Shielding	Package
DMX01	6.0	2	28/0.1	Tinned copper + Al. foil	80/0.1/OFC/BD+AL+ D7/0.12/TC	100M/Drum
DMX02	6.5	2	32/0.2	Tinned copper + Al. foil	128/0.1/OFC/BD+AL+ D7/0.12/TC	100M/Drum
DMX412	6.5	4	28/0.1	Tinned copper + Al. foil	128/0.1/TC	100M/Drum



## Transparent Speaker Cable

- 99.99% High purity OFC copper conductor with low resistance value, providing better signal transmission.
- Twisted strands to reduce interference
- Anti-oxidizing material
- Class I flexible PVC jacket
- Red bar to identify positive and negative poles
- Meter marks can be printed on the cable
- Color options: red, blue, customizing



## Transparent Speaker Cable

- 99.99% High purity OFC copper conductor with low resistance value, providing better signal transmission.
- Twisted strands to reduce interference
- High performance tinsel wire
- Anti-oxidizing material
- Dual Jacket protection
- Red bar to identify positive and negative poles
- Meter marks can be printed on the cable
- Color options: red, blue, customizing

### Application

- Permanent installation in buildings, recording studios, broadcast, Car audio, home theater
- Interior wiring of racks and HiFi Loudspeakers, amplifier etc
- Connect to banana connector, U-spade connector and other speaker connectors

### Application

- Permanent installation in buildings, recording studios, broadcast, Car audio, home theater
- Interior wiring of racks and HiFi Loudspeakers, amplifier etc
- Connect to banana connector, U-spade connector and other speaker connectors

Item Code	OD (MM)	Cross Section MM <sup>2</sup>	Strands	Strands Ø (MM)	Cond.	Temperature (°C)	Package
ASP02-075	2.3X4.9	2x0.75	96	0.1	OFC	-20~80°C	50/100m coil/drum
ASP02-100	2.5X5.2	2x1.0	127	0.1	OFC	-20~80°C	50/100m coil/drum
ASP02-150	2.8X5.8	2x1.5	191	0.1	OFC	-20~80°C	50/100m coil/drum
ASP02-200	3.2X6.5	2x2.0	255	0.1	OFC	-20~80°C	50/100m coil/drum
ASP02-250	3.5X7.3	2x2.5	318	0.1	OFC	-20~80°C	50/100m coil/drum
ASP02-240	4.3X9.0	2x4.0	510	0.1	OFC	-20~80°C	50/100m coil/drum


Item Code	OD (MM)	Cross Section MM <sup>2</sup>	Strands	Strands Ø (MM)	Cond.	Temperature (°C)	Package
DSP104	3.0X6.0	2x0.28	49+1P	0.08	OFC+ Tinsel	-20~80°C	50/100m coil/drum
DSP204	3.5X7.0	2x10.53	99+1P	0.08	OFC+ Tinsel	-20~80°C	50/100m coil/drum
DSP304	4.0X8.0	2x0.78	149+1P	0.08	OFC+ Tinsel	-20~80°C	50/100m coil/drum
DSP404	4.2X8.4	2x1.04	199+1P	0.08	OFC+ Tinsel	-20~80°C	50/100m coil/drum
DSP604	4.5X9.0	2x1.54	299+1P	0.08	OFC+ Tinsel	-20~80°C	50/100m coil/drum
DSP804	5.0X10.0	2x2.04	399+1P	0.08	OFC+ Tinsel	-20~80°C	50/100m coil/drum





## Transparent Speaker Cable

- 99.99% High purity OFC copper conductor with low resistance value, providing better signal transmission.
- Twisted strands to reduce interference
- High performance tinsel wire
- Anti-oxidizing material
- Dual Jacket protection
- Meter marks can be printed on the cable
- Color: transparent Golden/silver, blue gold/silver

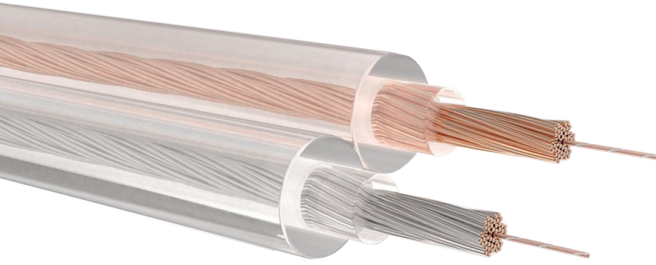

### Application


- Permanent installation in buildings, recording studios, broadcast, Car audio, home theater
- Interior wiring of racks and HiFi Loudspeakers, amplifier etc
- Connect to banana connector, U-spade connector and other speaker connectors

Item Code	OD (MM)	Cross Section MM <sup>2</sup>	Strands	Strands Ø (MM)	Cond.	Temperature (°C)	Package
DSP103	3.0X6.0	2x0.28	49+1P	0.08	OFC+TC +Tinsel	-20~80°C	50/100m coil/drum
DSP203	3.5X7.0	2x10.53	99+1P	0.08	OFC+TC +Tinsel	-20~80°C	50/100m coil/drum
DSP303	4.0X8.0	2x0.78	149+1P	0.08	OFC+TC +Tinsel	-20~80°C	50/100m coil/drum
DSP403	4.2X8.4	2x1.04	199+1P	0.08	OFC+TC +Tinsel	-20~80°C	50/100m coil/drum
DSP603	4.5X9.0	2x1.54	299+1P	0.08	OFC+TC +Tinsel	-20~80°C	50/100m coil/drum
DSP803	5.0X10.0	2x2.04	399+1P	0.08	OFC+TC +Tinsel	-20~80°C	50/100m coil/drum




## Parallel Speaker Cable

- 99.99% High purity OFC copper conductor with low resistance value, providing better signal transmission.
- Twisted strands to reduce interference
- High performance tinsel wire
- Anti-oxidizing material
- Dual Jacket protection, with frost-resistance PVC jacket

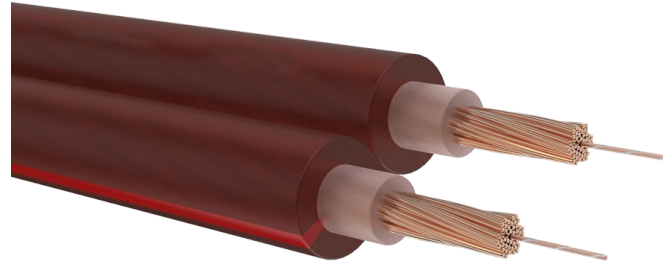

### Application

- Permanent installation in buildings, recording studios, broadcast, Car audio, home theater
- Interior wiring of racks and HiFi Loudspeakers, amplifier etc
- Connect to banana connector, U-spade connector and other speaker connectors



Item Code	OD (MM)	Cross Section MM <sup>2</sup>	Strands	Strands Ø (MM)	Cond.	Temperature (°C)	Package
DSP106	3.0X6.0	2x0.32	48+2P	0.08	OFC+Tinsel	-20~80°C	50/100m coil/drum
DSP206	3.5X7.0	2x0.57	98+2P	0.08	OFC+Tinsel	-20~80°C	50/100m coil/drum
DSP306	4.0X8.0	2x0.82	148+2P	0.08	OFC+Tinsel	-20~80°C	50/100m coil/drum
DSP406	4.2X8.4	2x1.08	198+2P	0.08	OFC+Tinsel	-20~80°C	50/100m coil/drum




## Black Red Cable

- 99.99% High purity OFC copper conductor with low resistance value, providing better signal transmission.
- Twisted strands to reduce interference
- Color: black/red, blue/white



## HiFi Parallel Speaker Cable

- Conductor: Silver clad copper + 99.99% purity OFC
- Twisted strands to reduce interference
- High performance tinsel wire
- Anti-oxidizing material
- Dual Jacket protection, with frost-resistance PVC jacket

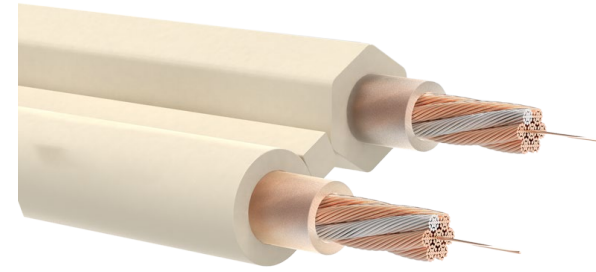

## Application

- Installation for LED , CCTV, Car audio, speakers
- Interior wiring for electrical units
- Connect to power connector

## Application

- Permanent installation in buildings, recording studios, broadcast, Car audio, home theater
- Interior wiring of racks and HiFi Loudspeakers, amplifier etc
- Connect to banana connector, U-spade connector and other speaker connectors

Item Code	OD (MM)	Cross Section MM <sup>2</sup>	Strands	Strands Ø (MM)	Cond.	Temperature (°C)	Package
BR2030	1.8X3.6	2x0.3	17	0.15	OFC	-20~80°C	100/200M coil
BR2050	2.0X4.0	2x0.5	28	0.15	OFC	-20~80°C	100/200M coil
BR2075	2.3X4.6	2x0.75	42	0.15	OFC	-20~80°C	100/200M coil
BR2100	2.5X5.0	2x1.0	57	0.15	OFC	-20~80°C	100/200M coil
BR2150	2.8X5.6	2x1.5	85	0.15	OFC	-20~80°C	100/200M coil
BR2250	3.5X7.0	2x2.5	142	0.15	OFC	-20~80°C	100/200M coil

Item Code	OD (MM)	Cross Section MM <sup>2</sup>	Strands	Strands Ø (MM)	Cond.	Temperature (°C)	Package
FS382	4.6X10.0	2x0.32	30+158+3P	0.08	SCC+ OFC+ Tinsel	-20~80°C	50/100m coil/drum
FS383	6.8X17.0	2x0.57	49+245+5P	0.08	SCC+ OFC+ Tinsel	-20~80°C	50/100m coil/drum

※Tips:

Metal Conductivity Comparison		
Metal	Electrical resistivity (10 <sup>-6</sup> Ω-cm)	Thermal conductivity(w/m-k)
Silver	1.55	419
Copper	1.7	385
Gold	2.2	301
Aluminum	2.7	210



## Round Stage Speaker Cable

- 99.99% High purity OFC copper conductor with low resistance value, providing better signal transmission.
- Twisted pair to reduce interference
- High performance tinsel wire
- Color: Black, blue, grey, dark blue orange



### Application


- Permanent installation in buildings, recording studios, broadcast
- Connecting PA sound system of all kinds
- Outdoor professional mobile performance

Item Code	OD (MM)	Cross Section MM <sup>2</sup>	Strands	Strands Ø (MM)	Cond.	Temperature (°C)	Package
SPA-R210	7.5	2x1.0	126	0.1	OFC	-20~80°C	100M/Coil
SPA-R215	8.0	2x1.5	189	0.1	OFC	-20~80°C	100M/Coil
SPA-R220	8.5	2x2.0	252	0.1	OFC	-20~80°C	100M/Coil
SPA-R225	9.0	2x2.5	316	0.1	OFC	-20~80°C	100M/Coil
SPA-H2X05	7.0	2x0.4	50+4P	0.08	OFC+Tinsel	-20~80°C	100M/Coil
SPA-H2X075	7.3	2x0.53	92+2P	0.08	OFC+Tinsel	-20~80°C	100M/Coil
SPA-H2X10	7.5	2x0.7	126+2P	0.08	OFC+Tinsel	-20~80°C	100M/Coil
SPA-H2X15	8.5	2x1.02	189+2P	0.08	OFC+Tinsel	-20~80°C	100M/Coil
SPA-H2X20	9.5	2x1.34	252+2P	0.08	OFC+Tinsel	-20~80°C	100M/Coil
SPA-H2X25	10.0	2x1.6	306+1P	0.08	OFC+Tinsel	-20~80°C	100M/Coil



## Twisted Speaker Cable

- Conductor: Silver clad copper + 99.99% purity OFC
- Twisted strands to reduce interference
- High performance tinsel wire
- Anti-oxidizing material
- Dual Jacket protection, with frost-resistance PVC jacket

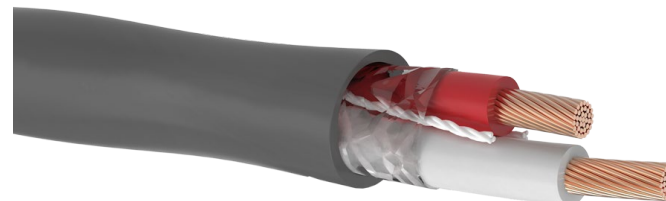

### Application


- Installation in buildings, recording studios, broadcast, home theater
- Connecting HiFi Loudspeakers, amplifier and other PA sound system

Item Code	OD (MM)	Cross Section MM <sup>2</sup>	Strands	Strands Ø (MM)	Cond.	Temperature (°C)	Package
SPT2075	6.0	2x0.44	73+2P	0.08	OFC+Tinsel	-20~80°C	100m coil/drum
SPT2100	6.8	2x0.56	98+2P	0.08	OFC+Tinsel	-20~80°C	100m coil/drum
SPT2150	7.5	2x0.81	148+2P	0.08	OFC+Tinsel	-20~80°C	100m coil/drum
SPT3200	8.0	2x1.07	198+2P	0.08	OFC+Tinsel	-20~80°C	100m coil/drum
SPT3250	9.0	2x1.57	298+2P	0.08	OFC+Tinsel	-20~80°C	100m coil/drum



## High Performance Shielded Speaker Cable

- 99.99% High purity OFC copper conductor with low resistance value, providing better signal transmission.
- Twisted pair to reduce interference
- Aluminum foil shielded to provide low noise signal transmission
- Cotton/ nylon yarn to increase tensile
- High performance tinsel wire
- Color: Blue, Black, Grey

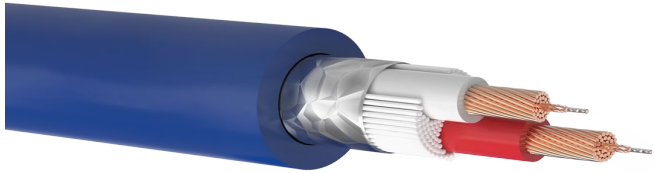

### Application


- Permanent installation in buildings, recording studios, broadcast
- Connecting PA sound system of all kinds
- Outdoor professional mobile performance

Item Code	No. of Cores	MM <sup>2</sup>	Strands	Strands Ø (MM)	Cond.	OD (MM)	Temperature (°C)	Pack
SPK-210	2	1.0	132+4P	0.08	OFC+Tinsel	7.5	-20~80°C	
SPK-215	2	1.5	192+7P	0.08	OFC+Tinsel	8.5	-20~80°C	
SPK-220	2	2.0	258+9P	0.08	OFC+Tinsel	9.5	-20~80°C	
SPK-225	2	2.5	316+12P	0.08	OFC+Tinsel	10	-20~80°C	
SPK-240	2	4.0	480+8P	0.08	OFC+Tinsel	12	-20~80°C	
SPK-410	4	1.0	132+4P	0.08	OFC+Tinsel	9.5	-20~80°C	
SPK-415	4	1.5	192+7P	0.08	OFC+Tinsel	10	-20~80°C	
SPK-420	4	2.0	258+9P	0.08	OFC+Tinsel	11	-20~80°C	
SPK-425	4	2.5	316+12P	0.08	OFC+Tinsel	12.5	-20~80°C	
SPK-440	4	4.0	480+8P	0.08	OFC+Tinsel	14	-20~80°C	



## High Performance SCC Shielded Speaker Cable

- Silver clad copper conductor + OFC
- Twisted pair to reduce interference
- High performance tinsel wire
- Aluminum foil shielded to provide low noise signal transmission
- Nylon yarn to make easier strip
- Color: Black, grey, Blue, Orange, customizing

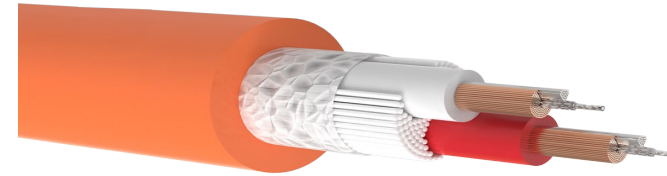

### Application


- Permanent installation in buildings, recording studios, broadcast
- Connecting PA sound system of all kinds
- Outdoor professional mobile performance

Item Code	OD (MM)	MM <sup>2</sup>	Strands	Strands Ø (MM)	Cond.	Temperature (°C)	Package
SP-S210	8.5	2x1.0	96+30+5P	0.08	SCC+OFC+Tinsel	-20~80°C	coil/drum
SP-S220	10.0	2x2.0	210+42+7P	0.08	SCC+OFC+Tinsel	-20~80°C	coil/drum

## SPKL410 Twisted Speaker Cable




- Conductor: OFC copper
- Twisted strands to reduce interference
- 100% foil shielded
- Anti-oxidizing material
- Applicable for PA sound system of all kinds

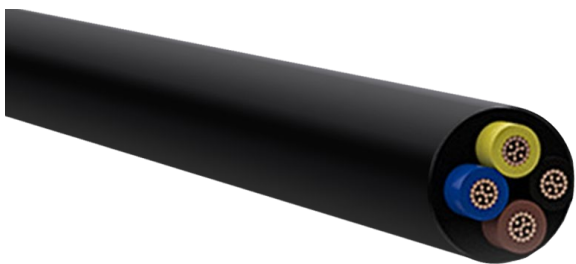

## RVV 300/500V Power Cable

- 99.99% High purity OFC copper
- Jacket:EU RoHS environmental protection
- Rated Voltage(V): 300/500V
- No./ Cores: 2C, 3C, 4C, 5C, 6C, 8C
- Size(mm<sup>2</sup>): 0.3, 0.5, 0.75, 1, 1.5, 2, 2.5, 4, 6mm<sup>2</sup>
- Certificate:CCC,CE,ISO9001,RoHS
- Color: Black

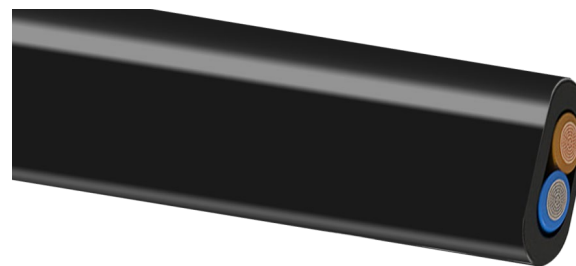

## Flat Power Cable

- 99.99% High purity OFC copper conductor with low resistance value, providing better signal transmission.
- Twisted pair to reduce interference
- High performance tinsel wire
- Mylar shielded
- Nylon yarn to make easier strip
- Color: Black

## Application


- Installation in buildings, low-voltage electrical house wiring
- CCTV, communication system wiring

Item Code	OD (MM)	Cores	MM <sup>2</sup>	Item Code	OD (MM)	Cores	MM <sup>2</sup>	Item Code	OD (MM)	Core s	MM <sup>2</sup>
PW-R3X250A	10	3	2.5	PW-R5X100A	8.8	5	1	PW-R2X075A	6.3	2	0.75
PW-R3X400A	11.4	3	4	PW-R6X050A	7.6	6	0.5	PW-R2X100A	6.9	2	1
PW-R3X600A	12.8	3	6	PW-R6X075A	9.6	6	0.75	PW-R2X150A	7.65	2	1.5
PW-R4X050A	6.4	4	0.5	PW-R6X100A	9.6	6	1	PW-R2X250A	9	2	2.5
PW-R4X075A	7.6	4	0.75	PW-R6X150A	11.2	6	1.5	PW-R2X400A	10.4	2	4
PW-R4X100A	8.2	4	1	PW-R7X050A	7.6	7	0.5	PW-R2X600A	11.9	2	6
PW-R4X150A	9.2	4	1.5	PW-R7X150A	11.2	7	1.5	PW-R3X050A	5.9	3	0.5
PW-R4X250A	11	4	2.5	PW-R8X050A	8.3	8	0.5	PW-R3X075A	6.9	3	0.75
PW-R5X050A	6.9	5	0.5	PW-R8X075A	10.2	8	0.75	PW-R3X100A	7.2	3	1
PW-R5X075A	8.4	5	0.75	PW-R8X100A	10.6	8	1	PW-R3X150A	8.4	3	1.5

Item Code	OD (MM)	Cross Section MM <sup>2</sup>	Cores	Cond. Material	Rated Voltage	Temperature (°C)	Package
PW-F2X030A	3.2x4.8	2x0.3	2	OFC	300/500 v	-20~80°C	200m/Coil
PW-F2X050A	3.5x5.3	2x0.5	2	OFC	300/500 v	-20~80°C	200m/Coil
PW-F2X075A	4.1x6.3	2x0.75	2	OFC	300/500 v	-20~80°C	200m/Coil
PW-F2X100A	4.3x6.8	2x1.0	2	OFC	300/500 v	-20~80°C	200m/Coil
PW-F2X150A	4.6x7.6	2x1.5	2	OFC	300/500 v	-20~80°C	200m/Coil
PW-F2X250A	5.3x9.0	2x2.5	2	OFC	300/500 v	-20~80°C	200m/Coil

## RVVP Shield Power Cable

- 99.99% High purity OFC copper
- Jacket:EU RoHS environmental protection
- Rated Voltage(V): 300/500V
- No./ Cores: 2C, 3C, 4C, 5C, 6C, 8C
- Size(mm<sup>2</sup>): 0.3, 0.5, 0.75, 1, 1.5, 2, 2.5, 4, 6mm<sup>2</sup>
- Certificate:CCC,CE,ISO9001,RoHS
- Color: Black

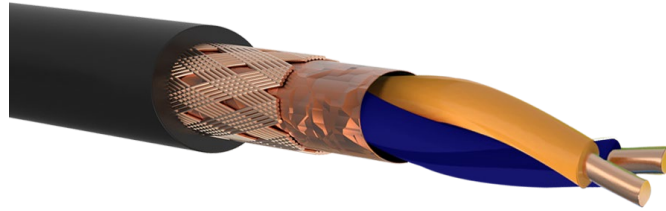


## RVVPS/RVSP Twisted Power Cable

- Conductor: high purity OFC copper
- No. of cors: 2C, 4C, 6C, 8C
- Conductor size: 0.3MM<sup>2</sup>, 0.5MM<sup>2</sup>, 0.75MM<sup>2</sup>, 1.0MM<sup>2</sup>, 1.5MM<sup>2</sup>, 2.5MM<sup>2</sup>, customizing
- Shield: 100% Aluminum foil + OFC copper braid
- Cable color: Black

Item Code	OD (MM)	Cores	MM <sup>2</sup>	Item Code	OD (MM)	Cores	MM <sup>2</sup>	Item Code	OD (MM)	Cores	MM <sup>2</sup>
PW-S2X050A	5.4	2	0.5	PW-S3X150A	8.5	3	1.5	PW-S5X075A	8.5	5	0.75
PW-S2X075A	6.4	2	0.75	PW-S3X250A	10.2	3	2.5	PW-S5X100A	9	5	1
PW-S2X100A	7	2	1	PW-S4X050A	6.5	4	0.5	PW-S5X150A	10.9	5	1.5
PW-S2X150A	7.6	2	1.5	PW-S4X075A	7.7	4	0.75	PW-S6X050A	7.7	6	0.5
PW-S2X250A	9	2	2.5	PW-S4X100A	8.3	4	1	PW-S6X075A	9.1	6	0.75
PW-S3X050A	6	3	0.5	PW-S4X150A	9.3	4	1.5	PW-S6X100A	9.7	6	1
PW-S3X075A	6.9	3	0.75	PW-S4X250A	11.2	4	2.5	PW-S6X150A	11.4	6	1.5
PW-S3X100A	7.3	3	1	PW-S5X050A	7	5	0.5	PW-S8X050A	8.4	8	0.5

Item Code	OD (MM)	MM <sup>2</sup>	Cores	Item Code	OD (MM)	MM <sup>2</sup>	Cores
PW-RS2X030A	5	0.3	2	PW-RS4X150A	11.8	1.5	4
PW-RS2X050A	5.4	0.5	2	PW-RS6X030A	7.4	0.3	6
PW-RS2X075A	6.4	0.75	2	PW-RS6X050A	8.8	0.5	6
PW-RS2X100A	7	1	2	PW-RS6X075A	10.5	0.75	6
PW-RS2X150A	7.8	1.5	2	PW-RS6X100A	11.6	1	6
PW-RS2X250A	9.2	2.5	2	PW-RS6X150A	12	1.5	6
PW-RS4X030A	7.2	0.3	4	PW-RS8X030A	8.5	0.3	8
PW-RS4X050A	8.5	0.5	4	PW-RS8X050A	10	0.5	8
PW-RS4X075A	9.4	0.75	4	PW-RS8X075A		0.75	8
PW-RS4X100A	10.6	1	4	PW-RS8X100A		1	8

## RG59 75Ω CCTV Coaxial Cable

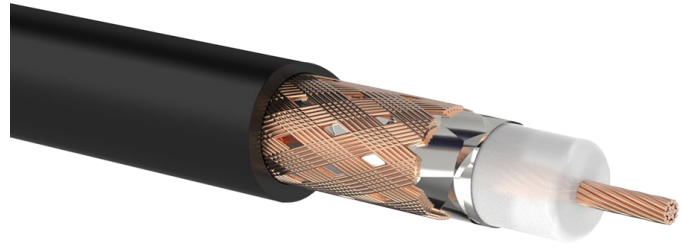

- Conductor: 1/1.02 OFC copper
- Insulation: 48 Foam PE
- Shield 1: Aluminum foil
- Shield 2: 64/0.12/CCA Braid
- Shield 3: Aluminum foil
- Shield 4: 128/0.12 CCA braid
- OD: 7.5MM

### Application

- Permanent installation in buildings, recording studios, broadcasting
- Antenna, CCTV, camera, satellite installation

Item Code	Cond. Size	Cond. Material	OD (MM)	No. of Al. Shield	Braid Shield	Insulation	Color
JK-C2755	1/0.75	OFC	7.0	1	96/0.12CCA	Foam PE	Black
JK-C2764	1/0.65	OFC	6.0	1	96/0.12CCA	Foam PE	Black
JK-C3763	26/0.1 2	OFC	6.0	1	96/0.12CCA	Foam PE	Black
JK-C3764	1/0.65	OFC	6.0	1	64/0.12CCA	Foam PE	Black
JK-C3765	1/0.65	OFC	6.0	1	96/0.12CCA	Foam PE	Black



## RG6/U 75Ω Coaxial Cable

- 18AWG BC/CCS conductor
- Dual / Quad shield
- Characteristic impedance : 75Ω
- Application:
  - CL1, CL2, CM, CMX and CMG installations
  - Antenna, cable television and satellite installations
- Optional color: Black, white, blue, orange

Item Code	Cond. Size	Cond. Material	OD (MM)	No. of Al. shield	Braid 1	Braid 2	Color
CX-1101	1.02	CCS	7.0	1	64/0.12CCA	/	White
CX-1102	1.02	CCS	7.5	2	48/0.12CCA	64/0.12CCA	White
CX-1104	1.02	BC	7.0	1	64/0.12CCA	/	White
CX-1105	1.02	BC	7.5	2	48/0.12CCA	64/0.12CCA	White
CX-1103	1.02	BC	7.5	2	48/0.12CCA	96/0.12CCA	Blue
CX-1107	1.02	BC	7.5	2	48/0.12CCA	112/0.12CCA	Blue
CX-1116	1.02	CCS	7.0	2	112/0.12CCA A	/	Orange
CX-1118	1.02	BC	7.5	3	64/0.12CCA	128/0.12CCA	Orange

## 3G-SDI/HD-SDI Coaxial Cable

- Item No.: CX1112
- Conductor: 1/1.02 OFC copper
- Insulation: 48 Foam PE
- Shield 1: Aluminum foil
- Shield 2: 64/0.12/CCA Braid
- Shield 3: Aluminum foil
- Shield 4: 128/0.12 CCA braid
- OD: 7.5MM




### Application

- Permanent installation in buildings, recording studios, broadcasting
- Connect to 3G-SDI/HD-SDI interface
- CCTV, camera, satellite installation

## Digital Coaxial Audio Cable


- Item No. :CX-170A
- Conductor: 1/0.75 OFC copper
- Insulation: 48 Foam PE
- Shield 1: Aluminum foil
- Shield 2: 112/0.1/BC Braid
- OD: 9.0MM
- Color: Black, orange, blue, customizing

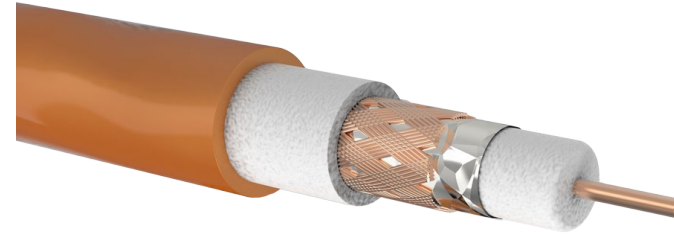

### Application

- Permanent installation in buildings, recording studios, broadcasting
- Connecting PA sound system
- Connect to RCA, transmitting subwoofer signal



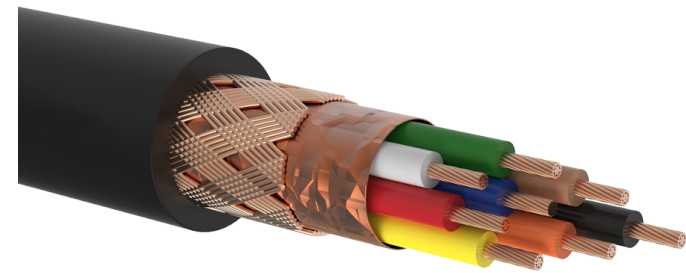


## VGA Signal Control Cable

- Item No.: V54
- Progressive scanning cable
- Conductor: OFC copper
- Shield: Aluminum foil+ CCAM braid
- OD: 8.0MM, 9.0MM
- No. of cores: 3+6, 3+9
- Optional color: Black, customizing

### Application

- Permanent installation in buildings, meeting room, CCTV system

Item Code	Cores	Cond. Material	OD (MM)	Shield 1	Shield	Color
D-V54	3+6	OFC	8.0	Aluminum foil	96/0.12CCA	White
D-V530	3+9	OFC	8.0	Aluminum foil	96/0.12CCA	White

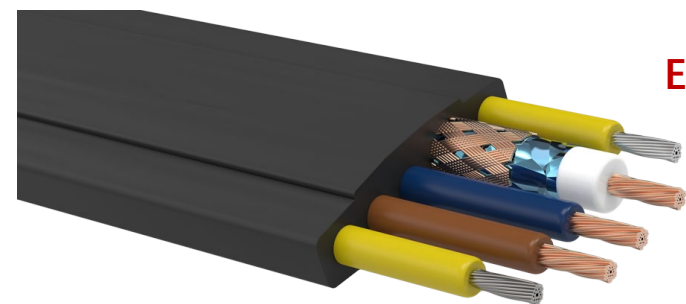


## Elevator CCTV Control Cable

- Item No.: SUS510
- RG59+2X0.5MM<sup>2</sup> Power+2x0.7mm<sup>2</sup> (SUS)
- Conductor: OFC copper
- Shield 1: Aluminum foil
- Shield 2: 128/0.09/BC Braid
- OD: 5.0+5.5+7.5+5.5+5.0+21.5MM
- Color: Black, customizing

### Application

- Installation for elevator CCTV control

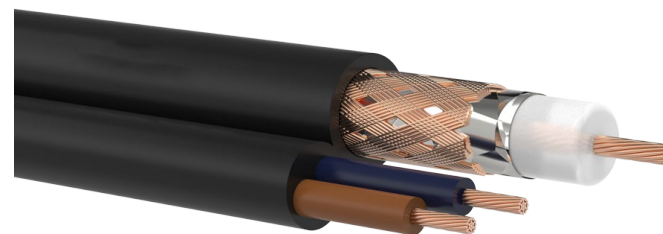


## 75Ω Coaxial Power Cable

- OFC copper conductor providing stable and low loss signal transmission
- 100% Aluminum foil shielded
- OFC/CCAM braid shielding
- 75Ω coaxial cable+2x0.5mm<sup>2</sup>/2x0.5mm<sup>2</sup>
- Class I PVC jacket, Environment friendly
- Rohs, CE, FCC compliant

### Application

- Permanent installation in buildings, CCTV system, meeting room, etc

Item Code	Coax. Cond.	Coax. Shield1	Coax. Shield2	Power Cores	Power Cond. Size	OD(MM)
FH-3752	24/0.1OFC	Al.foil	64/0.1 OFC	2	0.3mm <sup>2</sup> OFC	5.0X4.6
FH-2752	24/0.1OFC	Al.foil	64/0.1 CCAM	2	0.3mm <sup>2</sup> CCAM	5.0X4.6

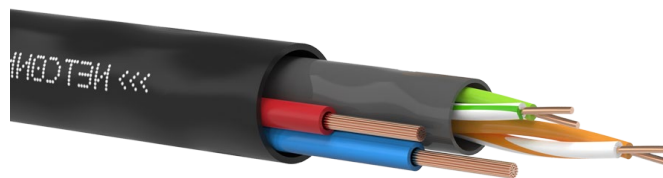


## Digital Coaxial Audio Cable

- Item No.: CAT5P2C01
- Conductor: 1/0.75 OFC copper
- Insulation: 48 Foam PE
- Shield 1: Aluminum foil
- Shield 2: 112/0.1/BC Braid
- OD: 9.0MM
- Color: Black, orange, blue, customizing

### Application


- Installation in buildings, CCTV, camera, meeting room, security system etc

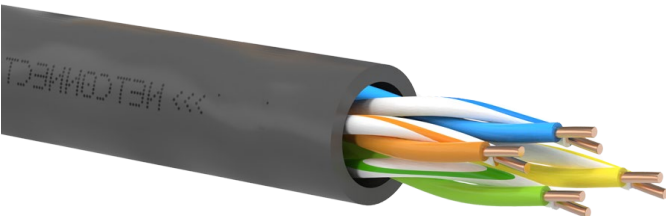

### UTP Cat5e Network Cable

- Fluke pass network cable
- UTP Cat5e
- Support network operating speeds of 10 Mbps, 100 Mbps or 1000 Mbps.
- Color: Black, dark grey, beige, blue, customizing


Item Code	No. Cores	Cond. Size	Cond. Material	OD (MM)	Color	Package
NT-5E221	8	0.45	OFC	5.2	Dark grey	100m, 305m/box, drum
NT-5E223	8	0.5	OFC	5.2	Dark grey	100m, 305m/box, drum
NT-5E226A	8	0.5	OFC	5.2	Dark grey	100m, 305m/box, drum

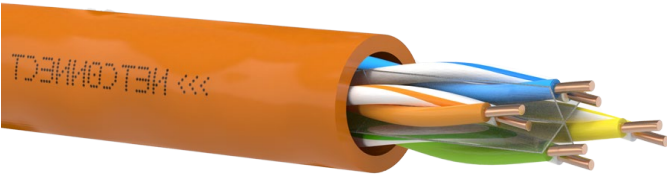

### UTP Cat6 Network Cable

- OFC copper conductor
- 8 cores twisted Cat6 lan cable
- Color: Orange, blue, black, grey, customizing

Item Code	No. Cores	Cond. Size	Cond. Material	OD (MM)	Color	Package
NT-6E334	8	0.57	OFC	6.2	Orange	100m, 305m/box, drum
NT-6E335	8	0.53	OFC	6.2	Orange	100m, 305m/box, drum
NT-UTP6	8	0.511	OFC	6.2	Orange	100m, 305m/box, drum

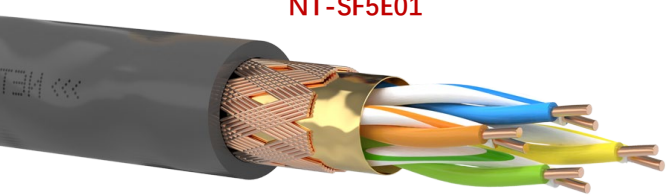

NT-SF5E01

### SFTP Cat5e Network Cable

- Conductor: 1/0.5 OFC
- Shield: 100% Aluminum shield+OFC braid
- OD: 6.2MM
- Fluke pass network cable
- Color: Black, dark grey, beige, blue, customizing
- Length: 100m, 300m
- Package: Coil, drum, box



NT-6E333GR  
NT-6E333BL

### UTP Cat6 Network Cable


- Conductor: 1/0.57 OFC copper
- 4pair twisted Cat6 lan cable
- OD: 6.2MM
- Fluke pass network cable
- Color: Black, dark grey, beige, blue, customizing
- Length: 100m, 300m
- Package: Coil, drum, box



NT-WP5E01

### Waterproof Cat5e Network Cable

- Conductor: 1/0.5 OFC
- OD:6.7MM
- Fluke pass network cable
- Color: Black, dark grey, beige, blue, customizing
- Length: 100m, 300m
- Package: Coil, drum, box

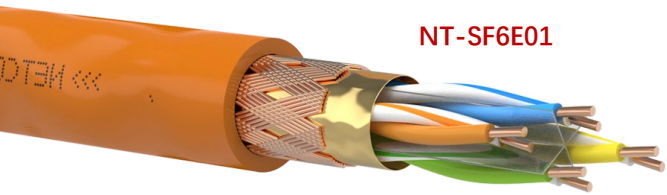

NT-SF6E01

### SFTP Cat6 Network Cable

- Conductor: 1/0.57 OFC copper
- Shield: Al. foil+ OFC copper braid
- OD: 7.2MM
- Color: Black, dark grey, beige, blue, customizing
- Length: 100m, 300m
- Package: Coil, drum, box