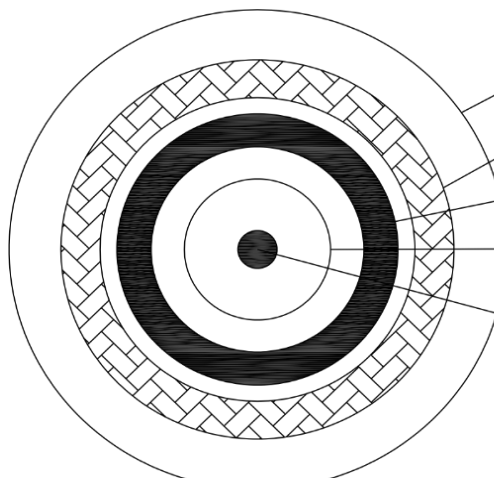


**SPECIFICATION:**

<b>Conductor</b>	AWG	20	 <p><b>Jacket</b> <b>Braid shield</b> <b>Al. foil shield</b> <b>Foam PE</b> <b>Conductor</b></p>
	Material	Oxygen-free copper	
	Nominal Diameter	0.82MM	
	Strands	Solid	
<b>Insulation</b>	Material	Foam PE	
	Nominal Diameter	3.68MM	
<b>Shield</b>	<b>Layer</b>	<b>1</b>	
	Type	Tape	
	Material	Conductive Aluminum Foil	
	Size	/	
	Coverage	100%	
	<b>Layer</b>	<b>2</b>	
	Type	Braid	<b>Marking</b>
	Material	Tinned OFC Copper	High Performance Audio Video Cable
	Size	0.14/8/16	<b>Packing</b>
	Coverage	95%	Coil pack, 100m/coil. Sticker: J2201 4rolls per carton Carton size: 520*260*240MM
<b>Jacket</b>	Material	Class I PVC	
	Color	Black	
	OD	6.1mm	

**CEKOTECH ELECTRONICS CO., LTD**

DATE	2021-2-25	TOLERANCE	± 0.2	CUSTOMER	GC	DWG NO.	WLD-TZ1602004
ITEM	RG-59 COAX CABLE	UNIT	MM	APPROVAL	HZM	SHEET	1